

FLOOD VENTS MAY REDUCE YOUR PREMIUM


Get Help From Our In-**House Insurance Partner**

RRPG's Licensed Agents can evaluate your situation, giving you solutions to reduce your costs without sacrificing coverage.

REVIEW YOUR PROPERTY

info@riskreductionplus.com





Working on a Project in the Floodplain?

CUSTOM VENT LAYOUT ASSISTANCE

Navigate complex codes with help from our experienced team of Engineers who can design flood vent layouts to meet any project's needs.

FREE PROJECT REVIEW

plans@smartvent.com



Flood vents protect structures by allowing bi-directional water flow that relieves hydrostatic pressure

ICC-ES CERTIFIED

Tested to comply with strict flood standards, FEMA requirements, & performance characteristics.

FLOOD ACTIVATED

Each vent door is triggered by rising water, with a 3-inch clearance for debris.

STAINLESS STEEL

Made with 316L marine-grade, materials that resist rust & rodents, lasting a lifetime.







Activate Extended Vent Warranty

smartvent.com/register



Engineered Flood Vents

CONTACT US

Our team of Certified Floodplain Managers are here for all of your product, installation, and code related questions.

Have Questions?

info@smartvent.com 1 (877) 441-8368

Find Us On Social Media









19 MANTUA RD, MT ROYAL, NJ 08061 THE SCHOOL OF FLOOD



RESIDENTIAL & COMMERCIAL

FLOOD VENT PROTECTION



Engineered to Protect™

1 (877) 441-8368 | smartvent.com

25+ YEARS OF FLOOD PROTECTION (ES)








BLACK WHEAT

NEED A CUSTOM COLOR? ASK OUR SALES TEAM

Durable Frame With Supports

Pivot Pin Bi-Directional Flow

Internal Float Activates Flood Door

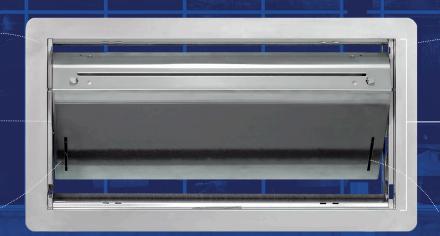

Stainless Steel 316L Marine-Grade

3" Clearance Meets ICC-ES Certification

Door Slots Activates Internal Floats



Stacker Models

Twice as efficient with 400ft² of flood coverage, Stackers are a great solution for insufficient wall space.

Dual-Function Insulated

LARGE SQUARE FOOTAGE?

Try Our Custom Configurations



UP TO 6X3 COVERING 800-3600 FT²

Multiframes are manufactured in a robust, onepiece design for commercial & industrial projects with dual function or insulated options.

CRAWLSPACES / GARAGES / ENCLOSURES / DETACHED BUILDINGS / WALKOUT ENCLOSURES

Wood Wall / 1540-570

14.5"W X 8.5"H X 3"D

Designed to screw in studs

spaced at 16" on center.

200 FT² FLOOD COVERAGE

Dual-Function / 1540-510

16"W X 8"H X 3"D

Provides 51 in² of air flow. A bi-metal coil

opens/closes flood door louvers.

316L STAINLESS STEEL MARINE-GRADE MATERIAL

ICC-FS 2074 CERTIFICATION

MADE IN THE USA **MANUFACTURED IN SC**

Insulated / 1540-520

16"W X 8"H X 3"D

Flood door has an insulated core with

an R-Value of 8.34 & felt stripping.

FINISH YOUR INTERIOR With A Clean Look



Sealing Kit

Finishes & seals interior spaces while still letting debris & water flow during a flood.



Trim + Sleeve

Fits into a rough opening to provide a clean, finished look on interior walls.

Make Installs A Breeze

-USE HURRIBOND, OUR SPECIFIED ADHESIVE

Hurribond is a fast-curing, multi-purpose silicone sealant & adhesive. Comes in gray or white.

1 TUBE PER 5-6 VENTS

PAINTABLE ALL-WEATHER QUICK-CURE SANDABLE



Protect From Fire (II)

Our Fire Damper provides 2-3 hours of UL-certified fire resistance. At 165°F, the door drops, blocking fire.



Our high-strength PVC bucks make installation in poured concrete walls easy. Shipped assembled ready to install.